



- Weatherproof high resolution 7" TFT LCD monitor
- 3 view color monitoring system
- 3 camera inputs
- Wide range input voltage (DC12V ~ 32V)
- Selectable mirror image mode
- Anti-Glare / anti-scratch protective lens and sunshield (option)
- OSD for AV source (Color, brightness, contrast, tint & volume control)
- Dual compatibility for NTSC / PAL video signals
- Integrated audio speaker
- Auto scan function
- Auto power on

SPECIFICATION

Screen size

7.0" (Diagonal)

Resolution

800(W) x 480(H)

Contrast ratio

500:1

Brightness

400cd/m²

Dot pitch (mm)

0.0642(W) x 0.1790(H)

Active area (mm)

154.08(H) x 85.92(V)

Viewing angle

Left70° / Right70° / Up50° / Down70°

Dimensions (Inch)

7.7"(W) x 5.7"(H) x 1.3"(D)

Color system

NTSC / PAL

Video output

1Vp-p (75Ω)

Connectors


Locking cable & lead wire

Power consumption

DC12 ~ 32volt, max 9.6W

Operating temperature

-20°C ~ +70°C (-4°F ~ +158°F)

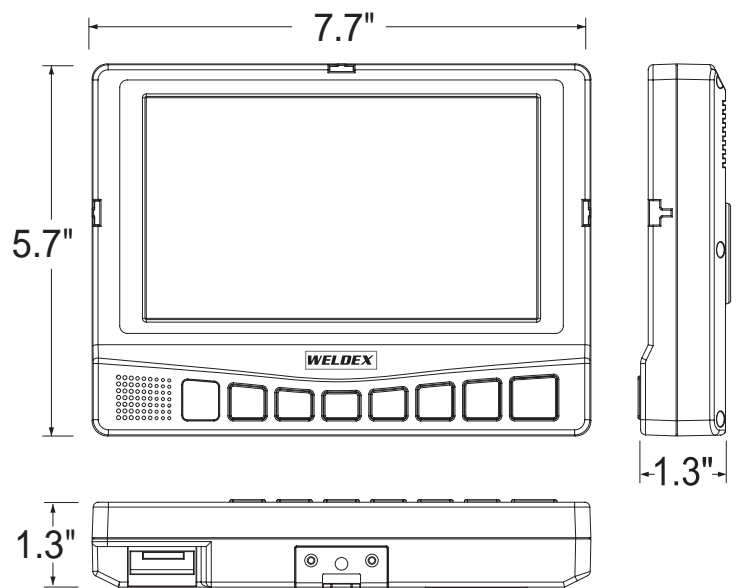

[7 Inch Series]