

## EMV400SSD


4 Channels 1080p Full HD Mobile DVR



### Features

- Full HD mobile DVR (supports Analog SD/Full HD cameras)
- Up to 1080p full HD resolution for live and recording
- Dual-stream from H.264 video compression format
- eZ.Controller function: Control camera OSD settings and PTZ operation directly from DVR end
- Supports SD card up to 128G
- Supports 2.5" SSD up to 4TB
- 3-axis G-sensor embedded
- Multiple serial interfaces
- IR remote control function
- Archives recordings to the USB storage device and FTP server
- Supports mobile applications (MobileFocus)
- Multiple network monitoring: Web viewer, Genie XMS Xfleet (Server System)
- Certificates: CE, FCC

### Dimensions

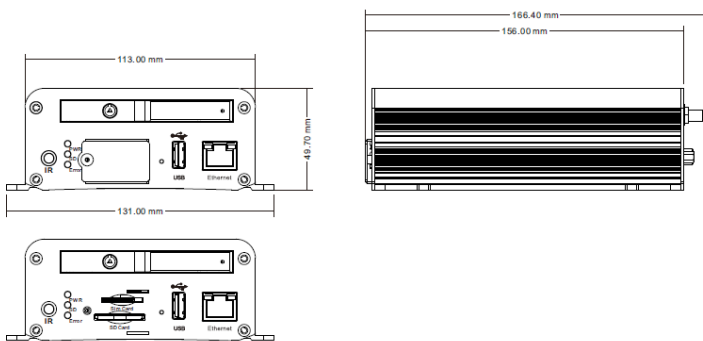

### Optional Accessories

You can use the optional accessories to expand the capabilities and versatility of the mobile DVR. Please contact your dealer for more information.

- 3G Antenna: For using 3G network function
- 4G Antenna: For using 4G LTE network function (LTE frequency bands differ among regions)
- GPS Antenna: For using GPS function
- Wi-Fi Antenna: For using Wi-Fi function
- External I/O Box: For connecting to the Alarm I/O and RS232 devices

# Specification

Model No.		EMV400SSD
Video Input	Number of Channels	4CH
	Video Compression	H.264
Audio	Audio Inputs	4
	Output	RCA x 1
Video Output	Video Output (Main Monitor)	VGA x 1
	Video Output (Call Monitor)	BNC x 1
Recording	Recording Resolution	1080p / 720p / 960H / D1 / CIF / QCIF
	Recording Mode	Event, Normal + Event, Schedule
	Recording Rate	30fps/CH (NTSC), 25fps/CH (PAL)
	Pre-Alarm Recording	Yes
Playback	Playback Mode	Duplex
	Playback Search	Time Search, Event Search
Video Detection & Alarm	Alarm Inputs	Yes (additional External I/O Box is required)
	Alarm Outputs	Yes (additional External I/O Box is required)
	Video Loss Detection	Yes
	Event Alarm	Yes
Network	Ethernet	RJ-45 Port x 1 (10/100M)
	Wi-Fi	Optional
	3G / 4G	Optional
	GPS	Optional
Storage	SD Card / SSD	SD Card x 1 (SDHC/SDXC, max. 128GB) / 2.5" SSD x 1 (max. 4TB)
External Interface	Interfaces	RJ-45 x 1, USB2.0 x 1, External I/O Port x 1
General	G-Sensor	3-Axis G-Sensor Embedded
	System Control	IR Remote Control, Mouse, Web UI
	PTZ Control	Yes
	Power Source	8-35VDC
	Power Consumption	10W
	Operating Temperature	-40°C~55°C / -40°F~131°F
	Dimensions (W x D x H)	131 x 166.4 x 49.7mm / 5.16" x 6.55" x 1.96"
	Weight	870g / 1.92lb
Certificates	CE, FCC	

## Remote Client System Minimum Requirements

Operating System	Windows XP (32-bit) / Win7 (32 and 64-bit)
CPU	Intel Core I3-2100
RAM	2GB
VGA	Intel HD 2000
LAN Speed	10 / 100 / 1000 Mbps (RJ45)
Web Browser	IE11 and later, Firefox 50 and earlier, Chrome 44 and earlier, EF browser
Other Remote Application	<ol style="list-style-type: none"> <li>EverFocus' Xfleet fleet management server system.</li> <li>EverFocus' mobile app: MobileFocus (iOS and Android); MobileFocusHD (iPad).</li> </ol>

### Find Out More At:

**EverFocus Taiwan HQ:**  
 TEL: +886 2 2698 2334  
[www.everfocus.com.tw](http://www.everfocus.com.tw)  
[marketing@everfocus.com.tw](mailto:marketing@everfocus.com.tw)

**EverFocus USA - California:**  
 TEL: +1 626 844 8888  
[www.everfocus.com](http://www.everfocus.com)  
[sales@everfocus.com](mailto:sales@everfocus.com)

**International Branch Offices:**  
 Germany, China, Japan

