


Everywhere You Want To Go...

DRAKE
DIGITAL

ND-24-IP

Network Decoder with HD-SDI, HDMI and Component outputs

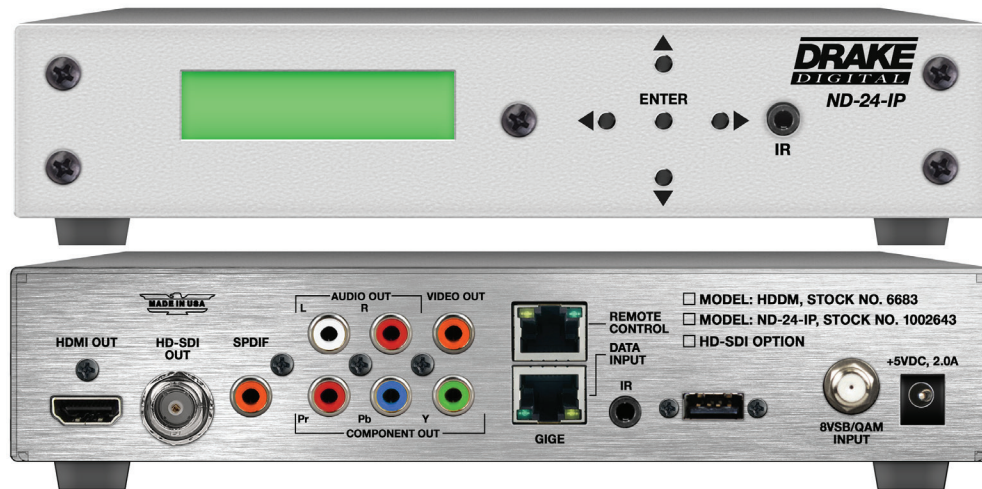

PRODUCT DESCRIPTION

The **ND-24-IP** is a low cost professional MPEG-2 and H.264 decoder that is capable of receiving content from off-air, clear QAM, and IP sources. The ND-24-IP is capable of outputting simultaneously video content in SDI, HDMI and component formats. SDI outputs are available in 3G-SDI, HD-SDI, or SD-SDI formats.

The unit can be used as a stand-alone high quality decoder, or used in conjunction with other IP encoders, to provide an end-to-end IP video delivery solution over a managed network.

When the ND-24-IP decoder is used with Drake's PEG encoder (PEG-NE24-IP-C Z), along with a Zixi Link License, it can provide a point-to-point reliable IP video transport from anywhere in the world with an internet connection. The ND-24-IP can also be used in a point-to-multipoint application, where the ND-24-IP would decode the IP based Zixi protocol stream from a Zixi Broadcaster.

The ND-24-IP features a Liquid Crystal Display (LCD) for front panel setup and easy to use management controls through IR, expansion port or an IP web-based GUI.

FEATURES

- Simultaneous SDI/HDMI/Component HD + Composite SD Outputs
- Decoding content from Off-Air, Clear QAM, and IP sources
- Supports both MPEG-2 and H.264 content
- LCD screen
- Closed Captioning
- VBR or CBR
- IGMPv2 and IGMPv3
- Pass-through of Dolby encoded embedded audio (Future firmware release)

Model	Item #	Description
ND-24-IP	1002643	Network Decoder with SDI, HDMI and Component outputs
ND-RP-2	1002653	Rack Mount Panel for (2) ND-24-IP Decoders
ND-24-Zixi-LIC	1002654	Zixi Link License for Point-to-Point Links
EP-RS232	6671	Cable Expansion Port to RS-232 Adapter

DRAKE

© Copyright 2016 R.L. Drake Holdings, LLC. All rights reserved.

TECHNICAL DATA and SPECIFICATIONS

ND-24-IP Network Decoder with HD-SDI, HDMI and Component outputs Item # 1002643

INPUT

IP Mode	
Connectors:	RJ-45
Standard:	100/1000Base-T Ethernet
UDP/RTP:	Supported
Protocols:	IGMPv3/IGMPv2 Supported

Stream Portfolio

SPTS and MPTS:	Null Packet Deletion
Bit Rate:	Variable and Constant

8VSB Mode

Connectors:	1x "F" Female
Standard:	ATSC Digital Television A/53E
Tuning Range:	UHF (Ch.14-69), VHF (Ch.2-13)
Data Rate:	19.392 MHz
Bandwidth:	6 MHz
Power Level:	-20 to +20 dBmV
Impedance:	75 Ω

QAM Mode

Connectors:	1x "F" Female
Standard:	ITU-T J.83; Annex A and B (64 & 256 QAM)
Tuning Range:	CATV Ch. 2-158 (STD, HRC, IRC)
Data Range:	38.8 Mbps (QAM 256); 26.97 Mbps (QAM 64) – Auto Detect
Bandwidth:	6 MHz
Power Level:	-15 to 20 dBmV (@ QAM 256), -20 to 20 dBmV (@ QAM 64)
Impedance:	75 Ω

ALARMS/MONITORING/CONTROL

Local

Monitoring:	Front-panel LCD screen
Control:	Front-panel Navigational Key-pad

Remote

Monitoring/ Control:	GUI-based menu via Web browser (1x RJ45 rear-panel connector; 10/100Base-T) Expansion Port for RS-232 Control (Requires Opt. Adapter Cable #6671) IR input: 3.5 mm stereo input for external IR remote
-------------------------	--

OUTPUT

3G/HD/SD-SDI

Connectors:	1x BNC
Standards:	SMPTE 259M (3G), SMPTE 292 (HD) & SMPTE 259M (SD)
Video Resolution:	480i, 720p, 1080i, & 1080p
Audio:	Embedded PCM

HDMI

Connectors:	1x HDMI
Video Resolution:	480i, 720p, 1080i, & 1080p
Audio:	Embedded PCM

Composite

Connectors:	1x RCA for Video
Video Resolution:	480i
Audio:	2x RCA for Analog Audio (L,R)

Component

Connectors:	3x RCA for Video (Y, Pb, Pr)
Video Resolution:	480i, 720p, & 1080i
Video Aspect Ratio:	4:3 & 16:9
Audio:	2x RCA for Analog Audio (L,R)

Digital Audio (SPDIF)

Connectors:	1x RCA
-------------	--------

GENERAL

Mechanical

Dimensions:	8.69 x 8.0 x 1.97 inches (220.7 x 203 x 50.0 mm)
Weight:	3.0 lbs (1.36 kg)
Operating Temperature:	32 to 122 °F (0 to 50 °C)
Storage Temperature:	-13 to 158 °F (-25 to 70 °C)
Operating Humidity:	0 to 95% RH @ 35 °C max, non-condensing
Storage Humidity:	0 to 95% RH @ 35 °C max, non-condensing

Power

Power:	5 VDC External Power Supply
Dissipation:	10 W

Specifications are subject to change without notice or obligation.

