


ST-MOD Installation Instructions

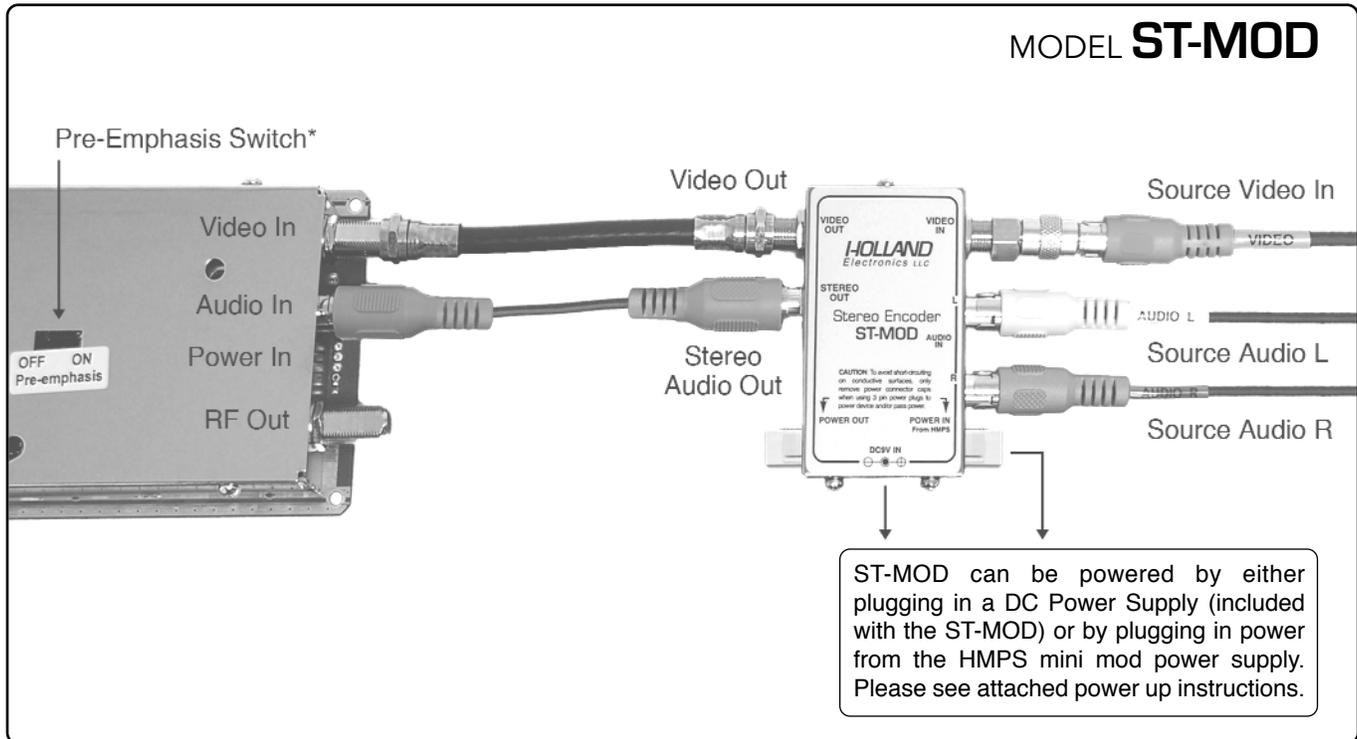

* For stereo change "Pre-emphasis" switch to off.

- 1 Connect "F" connector coax jumper (included) from "Video Out" of **ST-MOD** to "Video In" of the modulator.
- 2 Connect source "Video Out" to "Video In" of the **ST-MOD**.
- 3 Connect yellow RCA jumper (included) from "Stereo Out" of **ST-MOD** to "Audio In" of the modulator.
- 4 Disable modulator "Pre-emphasis" by switching to off position.
- 5 Connect source "Audio Left" and "Audio Right" to **ST-MOD** "Audio In Left" and "Audio In Right" respectively.
- 6 Plug in power source to **ST-MOD** by using Power Transformer (included) or by plugging in power from **HMPS** (if applicable). Please see **ST-MOD Powering Instructions** for proper powering connections (included).
- 7 Adjust audio deviation on modulator for optimal stereo separation.