

WDL-2700PVM


27" Public View Monitor



SPECIFICATION

Display	
Screen size	27"
Resolution	1920 x 1080
Brightness	300cd/m ²
Viewing angle	170(H) x 178(W)
Contrast ratio	1200:1
Aspect ratio	16:9
Response time	5ms (max 8ms)
Color system	NTSC/PAL multi (BNC 75Ω)
Camera	
Image sensor	1/2.8" SONY 2.38M progressive C-MOS
Lens	DC auto IRIS 2.8 ~ 12mm vari-focal
Frame rate	30fps
Backlight compensation	WDR (HDR)
Video Input/Output	
Video input	NTSC/PAL multi(BNC 75Ω) / D-SUB15P / DM-D / HDMI connector
Video output	CVBS (BNC)
Power	
Power (Display)	DC 24V / 5A (100~240V AC/DC adaptor)
Power (Camera)	12V / 0.5A (for external camera)
Environmental	
Operating temperature	0°C ~ +50°C (+32°F ~ +122°F)
Humidity	10~50% RH, non condensing
Dimensions	
Dimensions	671.0(W) x 467.5(H) x 69.6(D)(mm)
Weight	T.B.D

DIMENSIONS

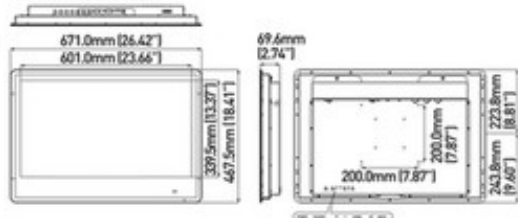

FEATURES

- High quality and cost-effective
- LED backlight
- Supported OSD (On screen display) and control button
- IR remote control
- 3D comb. filter
- 3D video noise reduction
- 3D motion adaptive deinterlacer
- In/Out connector location - top side
- VESA wall mount - 100 x 100, 200 x 200

